


Performance Bulletin

Test Date: 4th July 2014



Performance Data

RPM	Ave Km/h	Ave L/h	Ave Km/L
700	4.15	0.80	5.19
1000	5.90	1.30	4.54
1500	8.15	2.15	3.79
2000	10.30	3.80	2.71
2500	12.55	5.50	2.28
3000	18.30	7.30	2.51
3500	28.25	8.40	3.36
<u>4000</u>	<u>33.65</u>	<u>10.00</u>	<u>3.37</u>
4500	39.15	13.05	3.00
5000	45.85	15.40	2.98
5500	51.00	19.85	2.57
6000	56.55	22.80	2.48
6200	58.50	23.40	2.50

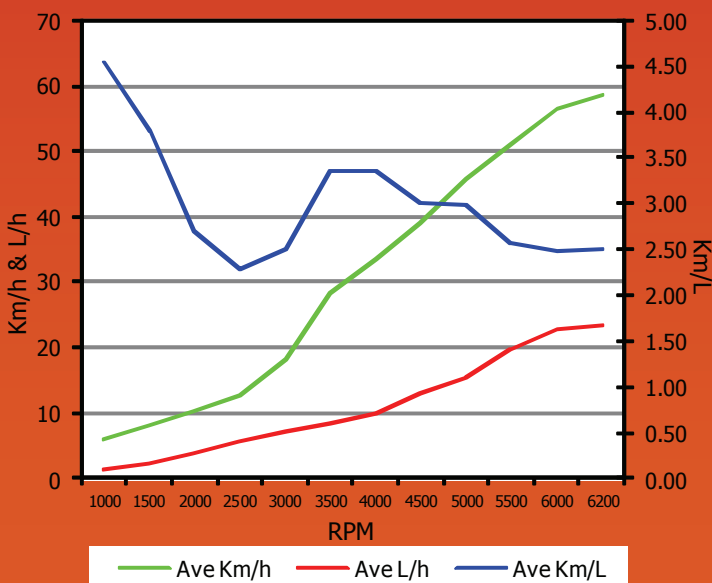

Test Performed by certified Yamaha Technicians

Boat Manufactured by:

<http://www.seajayboats.com.au/>

SEAJAY TUFF-MATE 5.0M

Length (LOA)	5.00M
Beam	2.14M
Dry Weight	475KGS
Max Hp	80HP
Fuel Capacity	80L
Weight as Tested (approximate)	854KGS

F70AETL

Horsepower	51.5kW (70ps) @ 5800rpm
Engine Type	16-Valve SOHC In-Line 4cyl
Weight	119kg
Gear Ratio	2.33 (28/12)
Mounting Height	# 2

PROPELLER

Series	White Alloy K Series
Diameter/ Pitch	13½ x 15"
Part Number	6E5-45947-00

TEST CONDITIONS

Crew	2
Air Temperature	17.5°C
Wind Speed	10 Knots
Fuel	80L
Water Temperature	17.7°C

TEST PERFORMANCE SUMMARY

Max Ave Speed	58.50Km/h or 31.53Knots
Best Cruising Km/L	3.37Km/L @ 4000rpm
Range, Based on 95% Fuel Capacity at Best Km/L	256 Kilometres
0 - 40 Km/h	6.55 Seconds (41.01M)

Data may vary due to changes in weather, tides, boat load, hull & propeller conditions, temperature, atmospheric pressure and wind direction. Fuel data gathered with a non-calibrated Yamaha fuel gauge. Speed data recorded with GPS receiver.
Yamaha Motor Australia accepts no responsibility for the accuracy of these readings.
All test data is recorded with the engine fully trimmed in (-4), until 5500 RPM, where possible.